


shot


instructions for use

1. Check mains connection, if disconnected.
2. Place the ring of the luminaire on the floor. Look after a secure stand and that the ring is flush with FFL (finished floor level).
3. Bring the ball on the ring to the desired position.
The ball should be tilted only that far, that backwater can't arise in cable- and mebrane tunnel – see figures.
4. Provide the electrical connection between safety plug and grounded electrical socket aboveground.
5. Grounded electrical sockets have to correspond to the essential protection class.
6. The safety plug signals the changeable location of the luminaire. Please note, that a fixed installation and/or a connection with an earth-joint is not permitted.

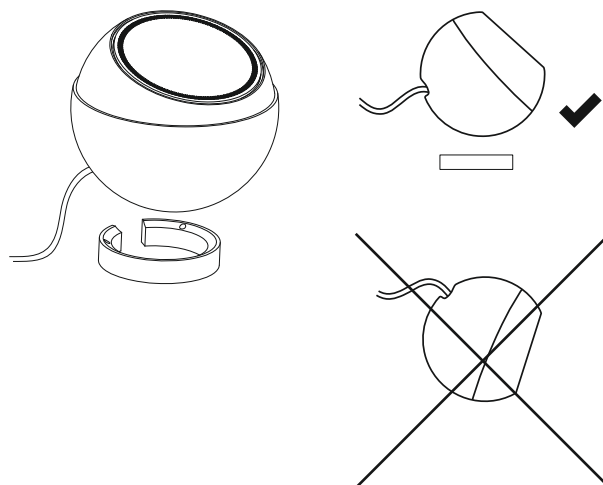

light technology:

IvyLight-technology
230V Power LED / 3000K
15 W/1350 lm


 A+ EEC

technical information:

operating voltage 230V / 50Hz

 IP65 protection class

 safety class 1

 Luminaire is suitable for mounting on normal inflammable fixing surfaces.

 CE conformity mark

maintenance:

Disconnect the electrical installation.

This luminaire contains built-in LED lamps. The lamps cannot be replaced in the luminaire.

dimming:

The luminaire can be dimmed with an approved leading- or trailing edge dimmer. Please contact IP44.de service center for a list of approved dimmers.

care:

Regularly clean luminaire from dirt and deposits. Do not use a high pressure cleaner for cleaning.

Please note care instructions at www.IP44.de.

safety:

We point out that the electric connection of light fixtures has to be done by a certified installer.

We assume no accountability for damages which are a result of non-appropriate mounting or application of the luminaire.

Modifications on the luminaire will result in loss of warranty.