

HEXO MINI

26-11-2015

1.0

PAR16 max. 15W | GU10 | 220-240VAC | 50-60Hz

CE IP20 960°C 0.9m

gold	300420G0
bronze	300420Q0
copper	300420P0
black texture	300420B0

OPTIONAL
for PAR16 lamps see our catalogue

2.0


2xPAR16 max. 15W | GU10 | 220-240VAC | 50-60Hz

CE IP20 960°C 0.9m


gold	301420G0
bronze	301420Q0
copper	301420P0
black texture	301420B0

OPTIONAL
for PAR16 lamps see our catalogue


HEXO MINI 1.0

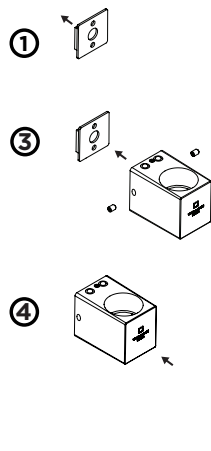

HEXO MINI 2.0

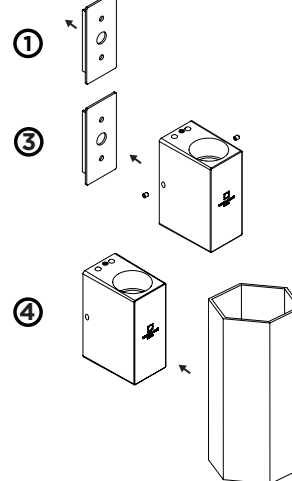

DIMENSIONS




MOUNTING INSTRUCTION

- 1 Mount the base plate on the wall

POWER CONNECTION

- 2 Connect the power supply.

Interior: STANDARD version



- 3 Mount inset on the back plate with side screws




- 4 Click cover over the inset

* For optional locking, unscrew the grub screw app. 3mm. The cover is now stable.

- 5 Mount the bulb with the PAR16 tool.



FOR OPTIONAL LOCKING:

* Lock the cover by unscrewing the grub screw app. 3mm. Then the cover is stable.



HEXO MINI 1.0

HEXO MINI 2.0

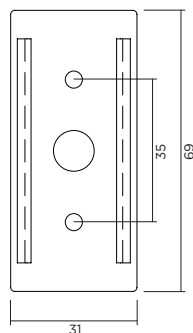

WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS