DOCUS

21-09-2015

1.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE ⏚ IP20 960°C ◖-0,3m 36° P ▪

	white texture	146364W_
	aluminium brushed	146364L_
	gold	146364G_
	copper	146364P_
	black texture	146364B_

LIGHT COLOUR

2200K	>80CRI	315lm	1
2700K	>80CRI	480lm	2
3000K	>80CRI	480lm	4

1.0 PAR16

PAR16 max. 35W | GU10 | 220-240VAC | 50-60Hz

CE ⏚ IP20 960°C ◖-0,9m ▪

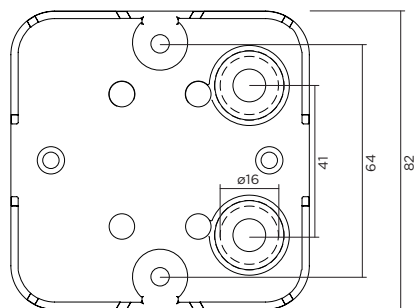|		
	white texture	146320W0
	aluminium brushed	146320L0
	gold	146320G0
	copper	146320P0
	black texture	146320B0

OPTIONAL
for PAR16 lamps see our catalogue

OPTIONAL
inner cover max. 10W

|		
	white texture	911021W1
	gold	911021G1
	black texture	911021B1

base plate dimensions

41 64 82 ø16

1.0 LED   **1.0 PAR16**

① ③ ④

DIMENSIONS

1.0 LED — 90 x 90 x 92

1.0 PAR16 — 90 x 90 x 92

INSIDE PAR16

9 40 Connector
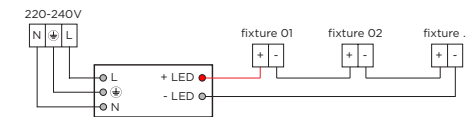
① MOUNTING INSTRUCTION

Remove the screws for the top part, put the cables through the opening and mount the base on the ceiling.

② POWER CONNECTION

SERIAL CONNECTION - for LED

Always use POWER SUPPLY 350mA / 500mA

220-240V
N ⏚ L
fixture 01   fixture 02   fixture . .
L + LED   + -   + -   + -
⏚ - LED
N

PARALLEL CONNECTION - for PAR16

220-240V
N ⏚ L
fixture 01   fixture 02   fixture . .
L N   L N   L N
⏚

③ For LED:
fix the plastic part together with the cover on the base with the screws.

For PAR16:
fix the cover on the base with the screws.

④ OPTIONAL inner cover:
put the inner cover in the outer cover and turn partially.
In case of PAR16 with inner cover: max. 10W

INSTALLATION INSTRUCTIONS