

FLOS

F1530030 Anthracite/Black Marble

Captain Flint

Designed by Michael Anastassiades, 2015


20W - 554lm - 2700K



Floor lamp providing adjustable direct light. Painted steel or brushed brass, stem and metal spinning cone. Opal photoengraved PC diffuser by injection molding. White Carrara or Black Marquina marble base. Power cord length 260 cm, with foot dimmer switch that provide ON-OFF functions and 10-100% light adjustment. Plug-in power supply with interchangeable plugs

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

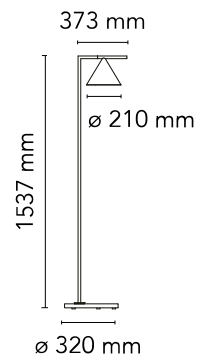

Main specifications

EAN	8059607001431
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	20
System flux (lm)	554

Physical

Colour	Anthracite/Black Marble
Length (mm)	320
Cord length (mm)	2500
Net weight (kg)	8.2
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.22
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/48
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by an end-user

Spare Parts

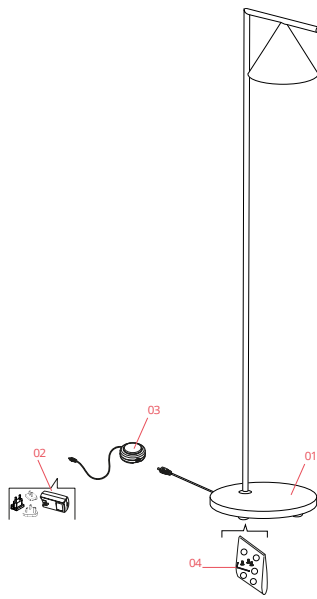

- | | | |
|-----|--------------------------------------|-----------|
| 01. | Black marble base | F1532030 |
| 02. | Black plug assembly kit & 48V driver | RF3320400 |
| 03. | Switch dimmer 400Ma | RF26382 |
| 04. | Screws with allen key and feet pads | RF1530100 |
| 10. | Assembly Coaxial Connector | RF3390130 |

DOWNLOAD



F1532030
Black marble base



RF3320400
Black plug assembly kit & 48V driver



RF26382
Switch dimmer 400Ma



RF1530100
Screws with allen key and feet pads



RF3390130
Assembly Coaxial Connector