





### Datos Técnicos

Luminaria para uso interior  
Factor de Potencia: 1  
Lámpara a utilizar:

#### Atlas Susp. & Atlas Susp. Ad.

E27 PAR 30 75W   
E27 LED PAR30 12W 

#### Atlas Mini Susp.

GU10 ES63 50W   
GU10 63 LED 6W 

Se recomienda que la instalación sea realizada por un profesional.

**Aviso:** Si el cable flexible o cordón de esta luminaria está dañado, deberá sustituirse exclusivamente por el fabricante o su servicio técnico o una persona de cualificación equivalente con objeto de evitar cualquier riesgo.

#### Instrucciones para la limpieza

Utilizar un paño suave, humedecido con agua y detergente neutro si fuera necesario. No utilizar alcohol o otros disolventes.



### Technical Data

Light fitting for indoor use only



Power Factor: 1

Bulb to be used:

#### Atlas Susp. & Atlas Susp. Ad.

E27 PAR 30 75W   
E27 LED PAR30 12W 

#### Atlas Mini Susp.

GU10 ES63 50W   
GU10 63 LED 6W 

A professional electrician should be responsible of the light installation.

**Warning:** If the wire or flexible cord is damaged, it has to be changed exclusively by the manufacturer, his technical service or a qualified personnel in order to avoid any risk.

#### Cleaning Instructions

Use a soft damp cloth, whit soap or neutral detergent. Don't use alcohol or other solvents.



Aislamiento básico más aislamiento reforzado.  
Toma de tierra: excluida.  
Basic insulation plus second insulation or both replaced by reinforced insulation.  
Earthing: excluded.



Distancia mínima a objetos iluminados.  
Min distance from illuminated objects.



No utilizar bombillas de reflector dicróico.  
Not use bulbs with dichroic reflector.




Este símbolo en su equipo o embalaje indica que el presente producto no puede ser tratado como residuo doméstico normal, sino que debe entregarse en el correspondiente punto de recogida de equipos eléctricos y electrónicos. Para recibir información detallada sobre el reciclaje de este producto, por favor, contacte con su ayuntamiento, su punto de recogida más cercano o el distribuidor donde adquirió el producto.

This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

230 V - 50 Hz

# ATLAS SUSP.


## Instrucciones de Montaje / Assembly Instructions

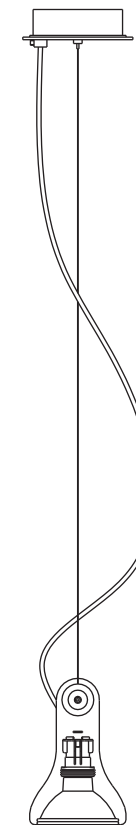

marset



marset

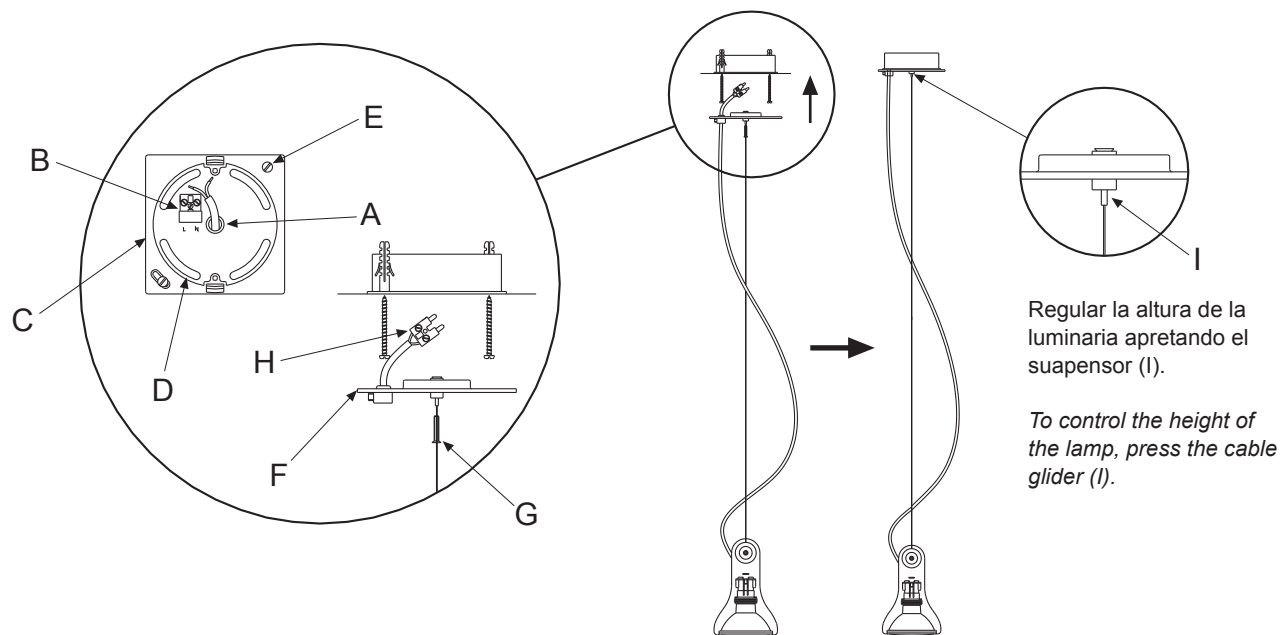

Regular la altura de la luminaria apretando el supensor (I).

To control the height of the lamp, press the cable glider (I).

**Atención!**

Desconectar la conexión a red antes de ser manipulada y realizar el cambio de bombilla sólo cuando esta se haya enfriado.

**Warning!**

Disconnect power supply before installation and change the bulb only when cold.

1. Pasar los cables de conexión a red por el orificio central (A) y conectarlos a la clema (B).
  2. Fijar en el techo el soporte (C) mediante los tornillos y tacos que se suministran y utilizando los orificios concéntricos (D).
- En caso de querer empotrar el soporte (C), hacer un orificio de 105 mm de diámetro y utilizar los orificios (E) para fijarlo.
3. Enchufar la clema (H).
  4. Fijar la tapa (F) en el soporte (C) mediante los tornillos (G).

1. Pass the power cable through the central hole (A) and make the electrical connections on the strip (B).
  2. Fix ceiling support (C) using screws and plugs provided.
- Recessed luminaire: Make a 105 mm hole and use the holes (E) to install the support (C).
3. Connect the strip (H).
  4. Attach the cover (F) to the support (C) using screws (G).