

Prop Light Suspended

BERTJAN POT



"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. You can hang them high, low, horizontally, vertically or even hang them in an angle. Put them on the floor, hang them on your wall or down from the ceiling. We find it very hard to imagine an interior where this prop is not in place" - Bertjan Pot

Detailing



A theatrical, extravagant look that is suitable for spaces with both low and high ceilings.

Colours

2000K

Warm White


2700K

Soft White


Prop Light Suspended Double

Dimensions

98cm | 38.6"



18cm | 7.1"



17cm | 6.7"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 18cm | 7.1"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10cm | 22.05lbs

Technical CE

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

A++

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATUE

2000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI

80

LIGHT OUTPUT

1600 lm

Technical cULus

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**LIGHTSOURCE TYPE**

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATUE

2000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI

80


LIGHT OUTPUT

1600 lm


Prop Light Suspended Double Horizontal

Dimensions

98cm | 38.6"



17cm | 6.7"



18cm | 7.1"

Product

WIDTH 98cm | 38.6"

HEIGHT 18cm | 7.1"

DEPTH 17cm | 6.7"

WEIGHT NETTO 6kg | 13.23lbs

Packaging

WIDTH 30cm | 11.8"

HEIGHT 30cm | 11.8"

CUBAGE 0.12m³ | 4.23ft³

LENGTH 133cm | 52.4"

WEIGHT 10cm | 22.05lbs

*Technical CE***MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE	LED	INSTALLATION REQUIRED	Yes
NUMBER OF LIGHTSOURCES	36	LIGHTSOURCE INCLUDED	Yes
INPUT VOLTAGE	110-240	SHAPE	Linear
MAX POWER CONSUMPTION	21W	FREQUENCY	50
LAMPHOLDER	LED (Solid state)	DIMMABLE	Yes
CABLE LENGTH	400cm 157.5"	COLOUR	Transparent with tinned cores
COLOUR TEMPERATUE	2000 K	CANOPY	Pebble II White, ABS
LIGHT DIRECTION	All directions	CRI	80
		LIGHT OUTPUT	1600 lm

Technical cULus

MATERIAL
HIPS housing, PMMA light guide, glass bulbs.


ENERGY LABEL		INSTALLATION REQUIRED	Yes
LIGHTSOURCE TYPE	LED	LIGHTSOURCE INCLUDED	Yes
NUMBER OF LIGHTSOURCES	36	SHAPE	Linear
INPUT VOLTAGE	110-240	FREQUENCY	50
MAX POWER CONSUMPTION	21W	DIMMABLE	Yes
LAMPHOLDER	LED (Solid state)	COLOUR	Transparent with tinned cores
CABLE LENGTH	400cm 157.5"	CANOPY	Pebble II White, ABS
COLOUR TEMPERATUE	2000 K	CRI	80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1600 lm

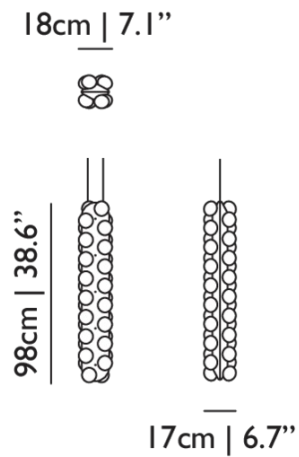*Prop Light Suspended Double Vertical**Dimensions**Product***WIDTH** 17cm | 6.7"**HEIGHT** 98cm | 38.6"**DEPTH** 18cm | 7.1"**WEIGHT NETTO** 6kg | 13.23lbs*Packaging***WIDTH** 30cm | 11.8"**HEIGHT** 30cm | 11.8"**CUBAGE** 0.12m³ | 4.23ft³**LENGTH** 133cm | 52.4"**WEIGHT** 10cm | 22.05lbs*Technical CE***MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

36

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

COLOUR TEMPERATUE

2700 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1600 lm

Technical cULus

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

36

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATUE

2700 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI

80



LIGHT OUTPUT

1600 lm

Prop Light Suspended Round Double

Dimensions

73cm | 28.7"



Product

WIDTH 73cm | 28.7"

HEIGHT 25cm | 9.8"

DEPTH 73cm | 28.7"

DIAMETER 73cm | 28.7"

WEIGHT NETTO 9kg | 19.84lbs

Packaging

WIDTH 88cm | 34.6"

HEIGHT 34cm | 13.4"

CUBAGE 0.27m³ | 9.4ft³

LENGTH 89cm | 35"

WEIGHT 15cm | 33.07lbs

Technical CE

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

41W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATUE

2000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI

80

LIGHT OUTPUT

1936 lm

*Technical cULus***MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

41W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

COLOUR TEMPERATURE

2000 K

CRI

80

LIGHT DIRECTION

All directions


LIGHT OUTPUT

1936 lm


Prop Light Suspended Round Double Vertical

Dimensions

73cm | 28.7"



25cm | 9.8"



Product

WIDTH 0cm | 0"**HEIGHT** 0cm | 0"**DEPTH** 25cm | 9.8"**DIAMETER** 0cm | 0"**WEIGHT NETTO** 15kg | 33.07lbs

Packaging

WIDTH 88cm | 34.6"**HEIGHT** 34cm | 13.4"**CUBAGE** 0.27m³ | 9.4ft³**LENGTH** 89cm | 35"**WEIGHT** 15cm | 33.07lbs

Technical CE

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

CRI

80

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1936 lm

*Technical cULus***MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

96

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATURE

2000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI



80

LIGHT OUTPUT

1936 lm

*Prop Light Suspended Round Single**Dimensions*

73cm | 28.7"

*Product***WIDTH** 73cm | 28.7"**HEIGHT** 19cm | 7.5"**DEPTH** 73cm | 28.7"**DIAMETER** 73cm | 28.7"**WEIGHT NETTO** 7kg | 15.43lbs*Packaging***WIDTH** 88cm | 34.6"**HEIGHT** 34cm | 13.4"**CUBAGE** 0.27m³ | 9.4ft³**LENGTH** 89cm | 35"**WEIGHT** 15cm | 33.07lbs

Technical CE

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATURE

2000 K

LIGHT DIRECTION

All directions

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

CRI

80

LIGHT OUTPUT

1078 lm

Technical cULus

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

48

INPUT VOLTAGE

110-240

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

400cm | 157.5"

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Disc

FREQUENCY

50

DIMMABLE

Yes

COLOUR

Transparent with tinned cores

CANOPY

Pebble II White, ABS

COLOUR TEMPERATURE

2000 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

1085 lm

Prop Light Suspended Single

Dimensions

98cm | 38.6"**18cm | 7.1"****13cm | 5.1"**

Product

WIDTH 98cm | 38.6"**HEIGHT** 13cm | 5.1"**DEPTH** 18cm | 7.1"**WEIGHT NETTO** 5kg | 11.02lbs

Packaging

WIDTH 30cm | 11.8"**HEIGHT** 30cm | 11.8"**CUBAGE** 0.12m³ | 4.23ft³**LENGTH** 133cm | 52.4"**WEIGHT** 10cm | 22.05lbs

Technical CE

MATERIAL

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

18

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

COLOUR TEMPERATURE

2000 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

499 lm

*Technical cULus***MATERIAL**

HIPS housing, PMMA light guide, glass bulbs.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

18

SHAPE

Linear

INPUT VOLTAGE

110-240

FREQUENCY

50

MAX POWER CONSUMPTION

21W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

COLOUR

Transparent with tinned cores

CABLE LENGTH

400cm | 157.5"

CANOPY

Pebble II White, ABS

COLOUR TEMPERATURE

2000 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

499 lm

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

DIMMER TYPE

Mains dimmable (trailing edge / reverse phase)

LOAD TYPE

Capacitive load (C-Type)